



'E-Z' FIT DOUBLE CHAIN CLAMPS

Ultra heavy duty double chain reforming alignment clamp

Range: 10—240"



The Double Chain Clamp is an extra heavy-duty clamp designed for alignment and reforming of pipes and vessels up to 20' (6M) with up to schedule 80 wall thickness. The double chain clamp will align pipes with any wall schedule.

Our specialised triple jackscrew heavy duty jackbars and double chain lock devices can deal with the most difficult of reforming jobs with operational ease.

The extra heavy-duty jackbars and double main block provide the strength to accomplish reforming jobs on pipe wall thicknesses that other clamps simply cannot. Models 10" to 36" to 10" to 54" come with level and support device and all other models come with cable hoist.

The 'E-Z' Fit Double Chain Clamps are available as stainless steel models with stainless steel contact points and chain to enable the welding of exotic materials with no risk of contamination. All clamps are supplied in their own durable storage cases.


Clamps can also be supplied with an optional torque wrench to apply the correct tension to the chain (150nm). This allows the exact required tension to be applied to the chain.

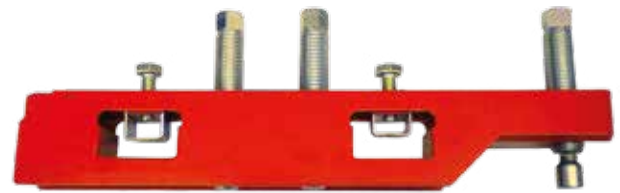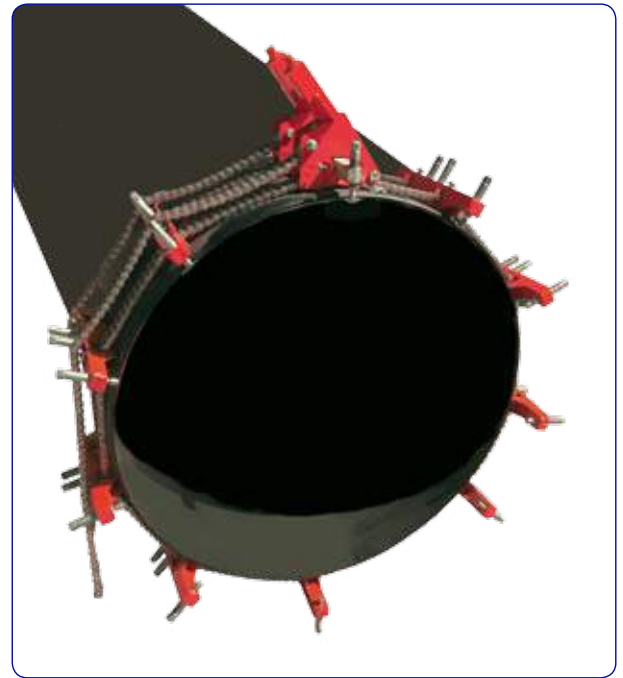

Heavy duty jackbars for arduous aligning and reforming jobs

Features and Advantages:

- **Precision Alignment** – The double jackbars, spaced around the outside diameter of the pipe, provide accurate alignment and reforming of the internal or external diameters of both pipes within 0.5mm
- **Extremely Tough** – Reforms pipes on both sides of the weld joint to schedule 80, and aligns all wall schedules, elbows, tees and other fittings
- **Adaptable** – The Chain Clamp can be used to align, and reform elbow, tees and other fittings that a cage clamp cannot cope with. One Chain Clamp covers the range of up to eight (8) cage clamps
- **Extra Heavy Duty Independent Jackbars** – Enable the operator to form the pipe to the required shape. Each Jackscrew has three (3) independently pivoting feet to cope with uneven surfaces
- **Versatile** – Elbows, tees and other fittings can be aligned with the level and support device

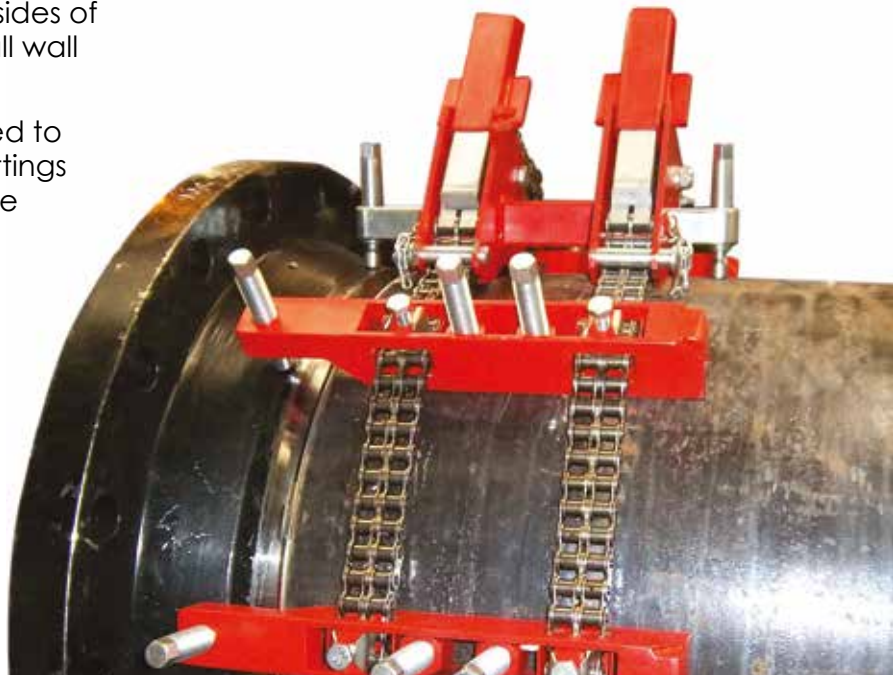


'E-Z' Fit Double Chain Clamp includes:

- Length of chain required for the pipe range
- Extra heavy-duty jackbars listed for the pipe range
- Number of Main blocks listed for the pipe range
- Two (2) fine adjustments
- Level and support device (larger clamps supplied with come-a-long)
- Jackscrew wrench
- Operating instructions

Optional:

- Torque wrench
- Carbon or stainless steel spacing screws
- Additional jackbars

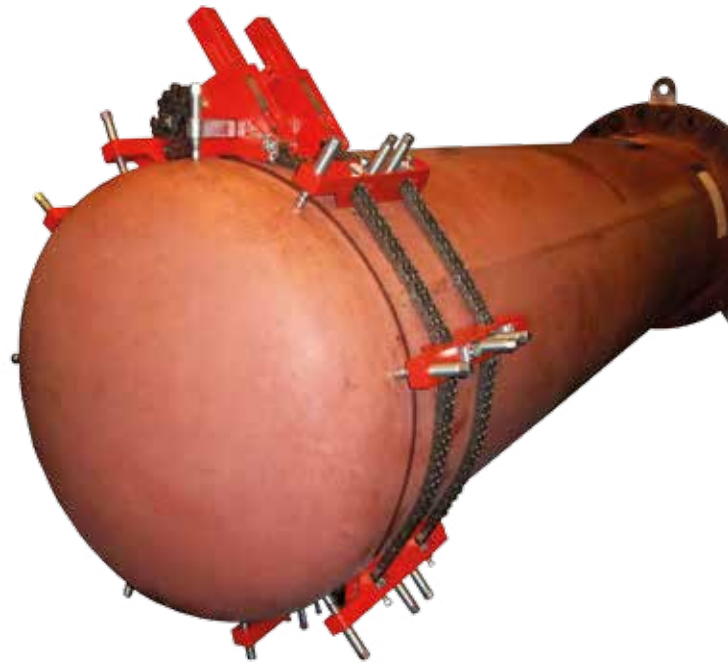

Sizes Available

PART NO.	PIPE DIAMETER RANGE (INCH / MM)	NO. OF JACKBARS	NUMBER OF MAIN BLOCKS	SHIPPING WEIGHT (KG / LBS)
EZDCC/10-36	10—36" / 254—915mm	9	1	100kg / 220lbs
EZDCC/10-36 SS	10—36" / 254—915mm	9	1	100kg / 220lbs
EZDCC/10-48	10—48" / 254—1220mm	12	1	126kg / 278lbs
EZDCC/10-48 SS	10—48" / 254—1220mm	12	1	126kg / 278lbs
EZDCC/10-54	10—54" / 254—1375mm	14	1	136kg / 300lbs
EZDCC/10-54 SS	10—54" / 254—1375mm	14	1	136kg / 300lbs
EZDCC/10-60	10—60" / 254—1525mm	16	1	149kg / 328lbs
EZDCC/10-60 SS	10—60" / 254—1525mm	16	1	149kg / 328lbs
EZDCC/10-72	10—72" / 254—1830mm	20	1	176kg / 387lbs
EZDCC/10-72 SS	10—72" / 254—1830mm	20	1	176kg / 387lbs
EZDCC/10-84	10—84" / 254—2135mm	24	1	200kg / 442lbs
EZDCC/10-84 SS	10—84" / 254—2135mm	24	2	200kg / 442lbs
EZDCC/10-96	10—96" / 254—2440mm	28	2	226kg / 498lbs
EZDCC/10-96 SS	10—96" / 254—2440mm	28	2	226kg / 498lbs
EZDCC/10-108	10—108" / 254—2745mm	32	2	251kg / 554lbs
EZDCC/10-108 SS	10—108" / 254—2745mm	32	2	251kg / 554lbs
EZDCC/10-120	10—120" / 254—3050mm	36	2	277kg / 610lbs
EZDCC/10-120 SS	10—120" / 254—3050mm	36	2	277kg / 610lbs
EZDCC/10-132	10—132" / 254—3355mm	39	2	299kg / 660lbs
EZDCC/10-132 SS	10—132" / 254—3355mm	39	2	299kg / 660lbs
EZDCC/10-144	10—144" / 254—3715mm	42	2	322kg / 710lbs
EZDCC/10-144 SS	10—144" / 254—3715mm	42	2	322kg / 710lbs
EZDCC/10-168	10—168" / 254—4270mm	48	3	367kg / 810lbs
EZDCC/10-168 SS	10—168" / 254—4270mm	48	3	367kg / 810lbs
EZDCC/10-192	10—192" / 254—4880mm	54	3	410kg / 910lbs
EZDCC/10-192 SS	10—192" / 254—4880mm	54	3	410kg / 910lbs
EZDCC/10-216	10—216" / 254—5490mm	60	3	455kg / 1010lbs
EZDCC/10-216 SS	10—216" / 254—5490mm	60	3	455kg / 1010lbs
EZDCC/10-240	10—240" / 254—6100mm	66	3	500kg / 1110lbs
EZDCC/10-240 SS	10—240" / 254—6100mm	66	3	500kg / 1110lbs

** Larger sizes available upon request*